
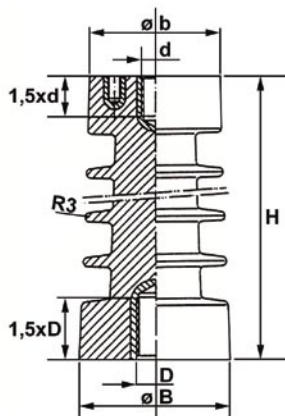


Insulators in epoxyresin of brown color.
For indoor use. Conical type
Conform IEC 273

Isolateurs en résine époxy brune.
Pour service intérieur. Type conique
Conforme CEI 273

Isolatoren in bruine epoxyhars.
Voor binnendienst. Conisch type
Conform IEC 273

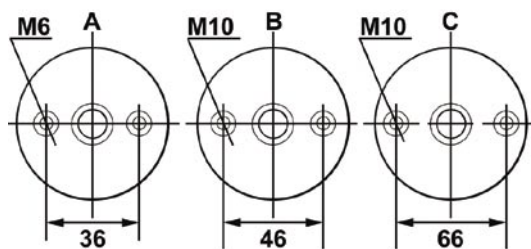

TYPE	R	1	2	3	H ± 1	N	b	B	d	D
		kV	kV	kV	mm	N	mm	mm		
JO 1,8 - 45	2	3,6	21	45	95	1800	40	55	M12	M12
JO 1,8 - 75	3	12	35	75	131	1800	40	55	M12	M12
JO 3,75 - 75	3	12	35	75	131	3750	60	70	M12	M16
JO 7,5 - 75	3	12	35	75	131	7500	70	95	M16	M20
JO 3,75 - 95	5	17,5	45	95	175	3750	60	75	M12	M16
JO 7,5 - 95	5	17,5	45	95	175	7500	70	100	M16	M20
JO 30 - 95	5	17,5	45	95	175	30000	115	150	M20	M24
JO 3,75 - 125	7	24	55	125	225	3750	60	80	M12	M16
JO 7,5 - 125	7	24	55	125	225	7500	70	115	M16	M20
JO 3,75 - 170	12	36	75	170	310	3750	60	100	M12	M20
JO 3,75 - 200	14	41,5	85	200	360	3750	60	105	M12	M20
JO 7,5 - 200	14	41,5	85	200	360	7500	70	125	M16	M24
JO 7,5 - 250	21	52,5	110	250	500	7500	70	130	M16	M24
JO 3,75 - 325	27	72,5	145	325	620	3750	60	110	M12	M20
JO 15 - 325	27	72,5	145	325	620	15000	100	170	M16	M24
JO 3,75 - 370	29	82,5	155	370	650	3750	60	110	M12	M20



Other types on request.
Autres types sur demande.
Andere types op aanvraag.

d and D can be adjusted on request.
d et D peuvent être ajustés sur demande.
d en D kunnen op aanvraag gewijzigd worden.

Insulators in epoxyresin of brown color.
For indoor use.
Conform IEC 273

Isolateurs en résine époxy brune.
Pour service intérieur.
Conforme CEI 273

Isolatoren in bruine epoxyhars.
Voor binnendienst.
Conform IEC 273

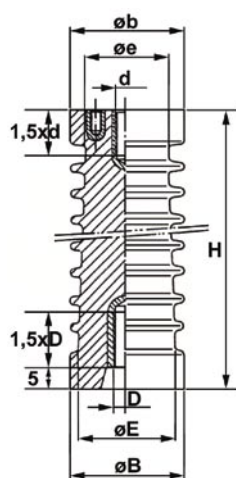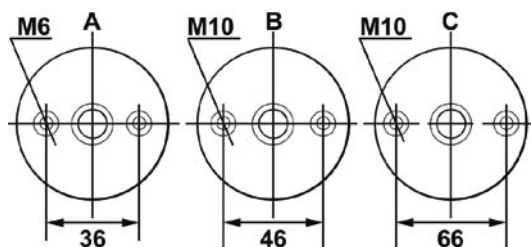

TYPE	R	1	2	3	H ± 1	N	B = b	e	E	d	D
		kV	kV	kV	mm	N	mm	mm	mm		
JO 2 - 60	2	7,2	28	60	95	2000	60	30	40	M12	M12
JO 4 - 60	2	7,2	28	60	95	4000	65	33	47	M12	M16
JO 6 - 60	2	7,2	28	60	95	6000	70	37	53	M12	M16
JO 8 - 60	2	7,2	28	60	95	8000	75	41	59	M16	M16
JO 2 - 75	3	10-12	38	75	130	2000	60	29	41	M12	M12
JO 4 - 75	3	10-12	38	75	130	4000	70	36	54	M12	M16
JO 6 - 75	3	10-12	38	75	130	6000	75	39	61	M12	M16
JO 8 - 75	3	10-12	38	75	130	8000	80	45	68	M16	M16
JO 10 - 75	3	10-12	38	75	130	10000	85	48	72	M16	M20
JO 16 - 75	3	10-12	38	75	130	16000	95	55	85	M16	M20
JO 6 - 95	5	17,5	50	95	175	6000	75	36	64	M12	M16
JO 10 - 95	5	17,5	50	95	175	10000	95	49	80	M16	M20
JO 10 - 95/2	5	17,5	50	95	175	10000	90	49	80	M16	M20
JO 6 - 125	7	20-25	50	95	210	6000	80	39	70	M12	M16
JO 8 - 125	7	20-25	50	95	210	8000	85	45	75	M16	M20
JO 16 - 125	7	20-25	50	95	210	16000	105	65	95	M16	M20
JO 10 - 145	10	30	70	145	285	10000	100	60	90	M16	M20
JO 4 - 170	11	36	70	170	300	4000	80	40	70	M16	M20
JO 6 - 170	11	36	70	170	300	6000	95	55	85	M12	M16
JO 10 - 170	11	36	70	170	300	10000	101	61	91	M16	M24
JO 10 - 170/2	11	36	70	170	300	10000	101	61	91	M16	M24

Other types on request.
Autres types sur demande.
Andere types op aanvraag.

d and D can be adjusted on request.
d et D peuvent être ajustés sur demande.
d en D kunnen op aanvraag gewijzigd worden.